

Preparation

**Part Number: PT922-03120**

**NOTE:** Part number of this accessory may not be the same as the part number shown.

**Kit Contents**

Item #	Quantity Req'd.	Description
1	1	Door Sill, Front Right Hand
2	1	Door Sill, Front Left Hand
3	1	Door Sill, Rear Right Hand
4	1	Door Sill, Rear Left Hand

**Hardware Bag Contents**

Item #	Quantity Req'd.	Description
1	N/A	

**Additional Items Required For Installation**

Item #	Quantity Req'd.	Description
1	N/A	
2		
3		

**Conflicts**

<p>illuminated Door Sills</p>
-------------------------------

**Recommended Tools**

<b>Personal &amp; Vehicle Protection</b>	<b>Notes</b>
Safety Glasses	
Safety Gloves	Optional
Vehicle Protection	Blankets, Part Boxes
<b>Special Tools</b>	<b>Notes</b>
Nylon Panel Removal Tool	
<b>Installation Tools</b>	<b>Notes</b>
<b>Special Chemicals</b>	<b>Notes</b>
All Purpose Cleaner	Mild, water based, solvent free all purpose cleaner.

**General Applicability**

<p>All Camry models including hybrid.</p>
---

**Recommended Sequence of Application**







Item #	Accessory
1	Door Sill Enhancement

**\*Mandatory**

**Vehicle Service Parts** (may be required for reassembly)

Item #	Quantity Req'd.	Description
1	N/A	
2		
3		

**Legend**

	<b>STOP:</b> Damage to the vehicle may occur. Do not proceed until process has been complied with.
	<b>OPERATOR SAFETY:</b> Use caution to avoid risk of injury.
	<b>CAUTION:</b> A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.
	<b>TOOLS &amp; EQUIPMENT:</b> Used in Figures calls out the specific tools and equipment recommended for this process.
	<b>REVISION MARK:</b> This mark highlights a change in installation with respect to previous issue.
	<b>SAFETY TORQUE:</b> This mark indicates that torque is related to safety.

**Procedure**

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation.

These guidelines can be found in the "Accessory Installation Practices" document.

This document covers such items as:-

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, rechecking torque procedure, etc.).
- Vehicle Disassembly/Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Please see your Toyota dealer for a copy of this document.

**1. Preparation**


- (a) Inspect all kit components and check for damage or missing parts.

**2. Vehicle disassembly**

**NOTE: Unless otherwise specified, procedure for driver and passenger side is the same.**

- (a) Remove the front left and front right door scuff plates using a nylon panel removal tool to disengage the 3 clips. (Fig. 2-1)

CLIP x 3: 

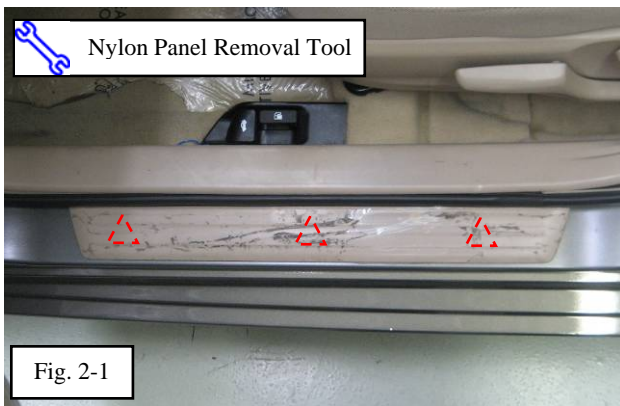

- (b) Remove the rear left and rear right door scuff plates using a nylon panel removal tool to disengage the 2 clips. (Fig 2-2)

CLIP x 2: 



**3. Install front left (driver side) and front right (passenger side) door sill enhancements.**

**NOTE: Unless otherwise specified, procedure for driver and passenger side is the same.**




Fig. 3-1




Fig. 3-2

- (a) Locate the front Right Hand (RH) door sill and the front Left Hand (LH) door sill. Right hand door sill is for the passenger side and left hand door sill is for the driver side.

-  (1) When installing the door sill on the correct side, the word “CAMRY” is toward the front of the vehicle. (Fig. 3-1)
- (2) “RH” and “LH” is indicated on the back of the door scuff plate.

- (b) Align the 3 clips of the door sill to the holes of the body rocker panel. Gently push the door scuff plate down to insert the clips. (Fig 3-2)

-  (1) Make sure door sill is properly snapped down in place and that there is no lifting or uneven gaps around the edges.

CLIP x 3: 

**4. Install rear left (driver side) and rear right (passenger side) door sill enhancements.**

**NOTE: Unless otherwise specified, procedure for driver and passenger side is the same.**



Fig 4-1

- (a) Locate the rear Right Hand (RH) door scuff plate and the rear Left Hand (LH) door scuff plate. Right hand door scuff plate is for the passenger side and left hand door scuff plate is for the driver side



- (1) When installing the door scuff plate on the correct side, the word “CAMRY” is slightly toward the front of the vehicle. (Fig. 4-1)

- (2) “RH” and “LH” is indicated on the back of the door scuff plate.

- (b) Line up the 2 clips with the mounting holes in the body. Gently push the door scuff plate down to insert the clips. (Fig. 4-2)



- (1) Make sure door scuff plate is properly snapped down in place and that there is no lifting or uneven gaps around the edges.

CLIP x 2: 

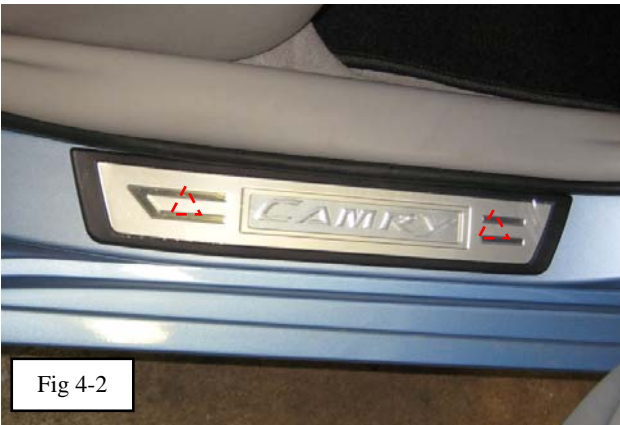


Fig 4-2

**5. Completing the installation.**

- (a) Clean up and remove any trash.

Checklist - these points **MUST** be checked to ensure a quality installation.

---

Check: \_\_\_\_\_

Look For: \_\_\_\_\_

Accessory Function Checks

Door sill fitment

There should be no uneven gaps around the edges, and clips should be securely fastened.