


Part #: PT398-47110

Conflicts:

Prius Persona models

Kit Contents

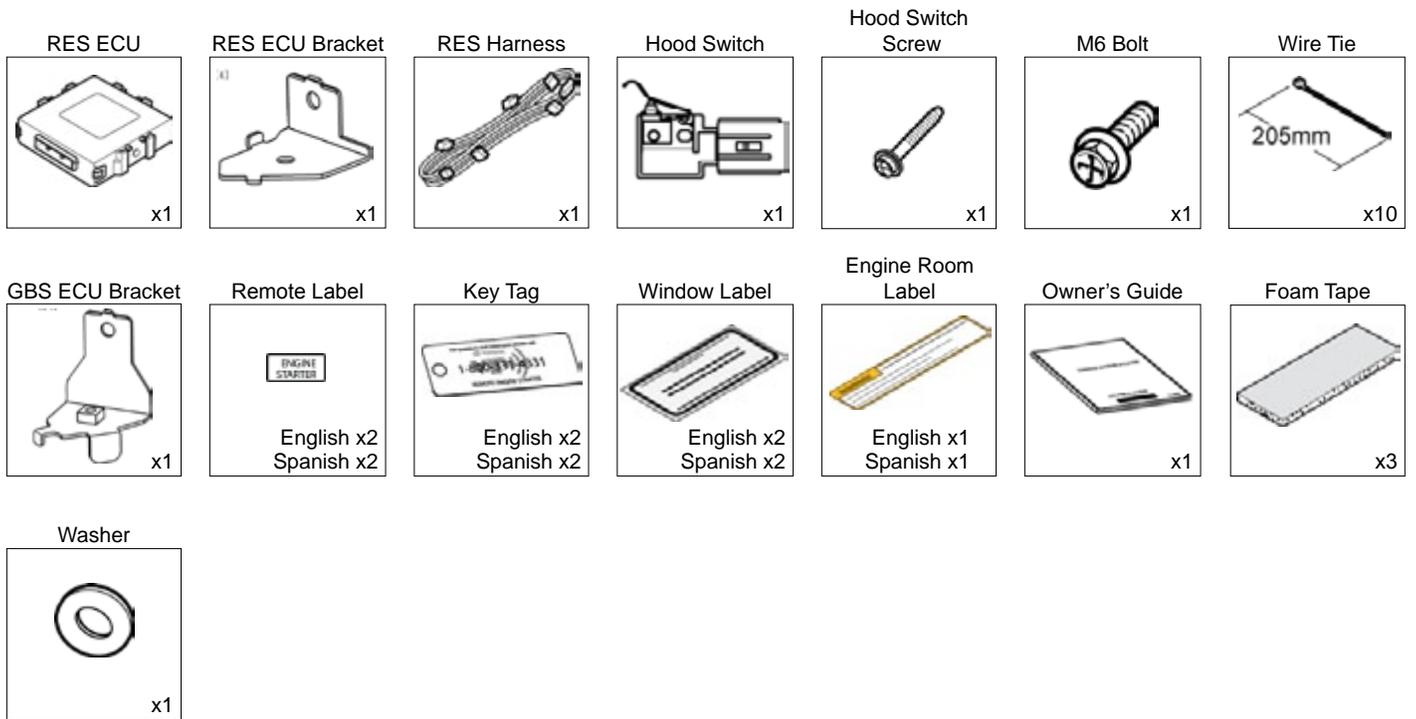

Additional Items

(may be required)

Item#	Description

Recommended Sequence of Application

Item#	Description
1	TVIP V5 RS3200 plus
2	TVIP V4 Remote Engine Starter

Recommended Tools

Personal & Vehicle Protection	Description
Safety Glasses	
Safety Gloves	(Optional)
Vehicle Protection	Blankets, Parts Boxes
Special Tools	
Techstream	Use latest version on TIS
Installation Tools	
Screwdriver	#2 Phillips, Flat Blade Jeweler's
Nylon Panel Removal Tool	e.g. Panel Pry Tool #1 Toyota SST# 00002-06001-01
Side Cutters	
Torque Wrench	48 in•lbf (5.4 N•m); 66.4 in•lbf (7.5 N•m)
Tape	Clear, Electrical
Socket	10mm, extension
Special Chemicals	
Cleaner	VDC Approved Cleaner
Glass Cleaner	Household Glass Cleaner

Table of Contents

I. Preparation 1–4

 1. Table of Contents 2

 2. Wire Routing Overview 3

II. Procedure 5–30

 1. Hood Switch Installation 5

 2. Disassembly (Driver’s Area) 10

 3. RES ECU Preparation 12

 4. V4 Wire Harness Installation (Driver’s J/B Area) 13

 5. V4 Wire Harness Installation (Driver’s Cowl Area) 17

 6. Registration Preparation... 23

 7. Registration 24

 8. Tags and Labels 29

 9. Complete the Installation 30

III. Checklist 31–33

 1. Accessory Function Checks 31

 2. Vehicle Function Checks 32

Legend

-  Do not proceed until process has been completed.
-  Follow steps carefully to avoid damaging the Vehicle or Accessory
-  Use caution to avoid injury.
-  Used in Figures to call attention to specific tools recommended for the process.
-  Highlights a change in installation with respect to previous issue.
-  Indicates that torque is related to safety.
-  Video available; click to play.

Accessory Installation Practice (read before installation)

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation.

These guidelines can be found in the “Accessory Installation Practices” document.

This document covers such items as:

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.)
- Safety (eye protection, checking torque procedure, etc.)
- Vehicle Disassembly/Reassembly (panel removal, part storage, etc.)
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.)

Please see your Toyota dealer for a copy of this document.

c. Remove the Rear Box.

d. Remove the Rear Trims to gain access to the Battery.


e. Disconnect the Negative Battery Terminal.

- Note the Battery Cable Position as it will be re-installed in the same position.

 **CAUTION:** Do not touch the Positive Terminal.

f. Swap the Bolt and Nut on the Negative Battery Terminal from one side to the other for easier installation.

Check if Hood Switch is installed

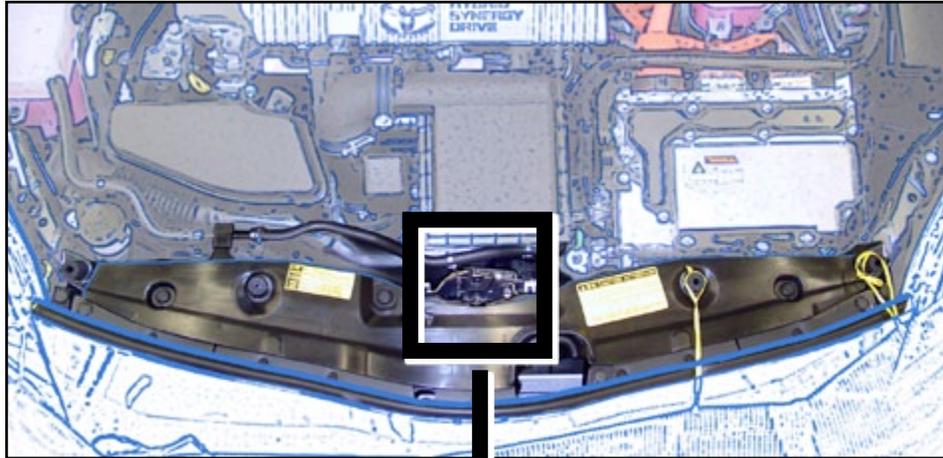

YES

NO

**WITH
Hood Switch**
(Go to Next Section, Page 10)

**WITHOUT
Hood Switch**

h. Dislodge the Hood Latch Assembly.

- Remove 3 Bolts.



Make sure to hold the Hood Switch by its sides.



Make sure the Hood Switch Lever is positioned properly.



If the Hood Switch is Broken RES will not function.

i. Install the Hood Switch with the Switch Lever underneath the Hood Latch Trigger Lever.



CAUTION: Make sure the Hood Switch Lever is under the Latch Lever.

j. Tighten 1 Screw.

k. Connect the Vehicle's Hood Switch Connector to V4 Hood Switch Connector.



Disconnect the Jumper Connector if installed.

l. Reinstall the Hood Latch Assembly.



m. Torque the Hood Latch Bolts to 66.4 in•lbf (7.5 N•m).

- n. Secure the Vehicle Hood Switch Harness to the Vehicle with 1 Wire Tie.

2. Disassembly. (Driver's Side)

- a. Remove the Driver's Side Step Cover.

- b. Remove the Driver's Side Cowl Cover.
 - Remove 1 Nut.

- c. Remove the Lower Dash Cover.
 - Remove 1 Screw.
- d. Wrap the Lower Dash Cover in a blanket and place on the floor.

- e. Dislodge the Steering Column's Center Clip.



CAUTION: Do not force this clip as it is very easy to break.

V4/V5 ADD ON ONLY

- c. Dislodge the GBS ECU Bracket.
 - Remove 1 Bolt and Washer.
 - Disconnect GBS Connector.



CAUTION: Do not drop the Bolt and Washer.

4. V4 Wire Harness Installation. (Driver's J/B Area)

- a. Disconnect the Vehicle Connectors on the right side of the Junction Box.

- b. Disconnect the 36P White Vehicle Connector.
 - Release Black Connector Lever.

- c. Using Flat Blade Jeweler's Screwdriver remove the Black Connector Lever.



- Do not force the Lever.

- d. Lift up the Terminal Retainer Clip.



- Do not pull out the Retainer Clip.



- e. Insert the V4 Red Wire Terminal into the indicated location on the 36P Vehicle Connector.

- Close the Terminal Retainer Clip.



- VERIFY:** Terminal Pins are properly inserted and do not come out.

- f. Re-attach the Black Connector Lever.
- g. Reconnect the Vehicle Connectors.

V4 ONLY

- h. Install RES ECU using the Bolt and Washer from the Kit.
- Attach GBS Bracket and RES Bracket.
 - Install the RES ECU with RES/ GBS Bracket.



CAUTION: Do not drop the Bolt and Washer.

V4/V5 ADD ON ONLY

- i. Attach GBS Bracket and RES Bracket.
- j. Install the RES ECU with GBS Bracket.



CAUTION: Do not drop the Bolt and Washer.

- k. Plug the V5 8P Connector to the GBS ECU.

- l. Dislodge the Vehicle's Harness Shielding.
 - Release 1 Clip.
- m. Route the V4 Harness along the Vehicle Harness towards the Driver's Cowl Area.
- n. Reinstall the Vehicle's Harness Shielding.
- o. Secure the V4 Harness to the Vehicle Harness Shielding with 1 Wire Tie.

- p. Plug the V4 RES Connector to RES ECU.
- q. Secure the V4 Harness to Vehicle Harness with 2 Wire Ties.

5. V4 Wire Harness Installation (Driver's Cowl Area)

- a. Secure V4 Harness to the Vehicle Harness with 1 Wire Tie.

V4 ONLY

- b. Connect the V4 3P Connector to the Vehicle's 3P Pre-connector.

f. Plug the V4 26P Connectors in between the Vehicle's Connectors.

g. Remove the Tape securing the RES Diagnostic Connectors.

h. Secure the V4 26P Connectors to the Vehicle Harness with 1 Wire Tie.

i. Secure the V4 12P, 3P and 1P Connectors to the Vehicle Harness with 1 Wire Tie.

j. Secure the V4 Harness to the Vehicle Harness with 1 Wire Tie.

V4/V5 ADD ON ONLY

k. Connect the V4 3P Connector to V5 3P Connector.

l. Cut 2 Wire Ties securing the V5 Harness.

m. Disconnect the V5's and Vehicle's 12P Connectors.

n. Plug the V4 12P Connectors in between the Vehicle's and V5 Connectors.

o. Disconnect the Vehicle's and V5's 26P Connectors.

p. Plug the V4 26P Connectors in between the Vehicle's and V5's Connectors.

q. Apply 1 Piece of Foam Tape to the metal edge of the opening above the Driver's Side Connector Block.


- r. Secure the V4 26P Connector to the Vehicle's Harness with 1 Wire Tie.
 - You may need to pull some of the Vehicle Harness out of the Pillar. DON'T FORCE THE HARNESS.
- s. Push the V4 26P Connector and the Vehicle Harness back into the opening in the Pillar.

- t. Secure the V5 26P Connector to the Vehicle Harness with 1 Wire Tie.
- u. Secure the V4 and V5 12P Connectors to the Vehicle Harness with 1 Wire Tie.

6. Registration Preparation.

V4 ONLY

- a. Using VDC approved cleaner and cleaning method, clean the area indicated on the Lower Dash Cover.
- b. Attach 2 Foam Tapes as shown.

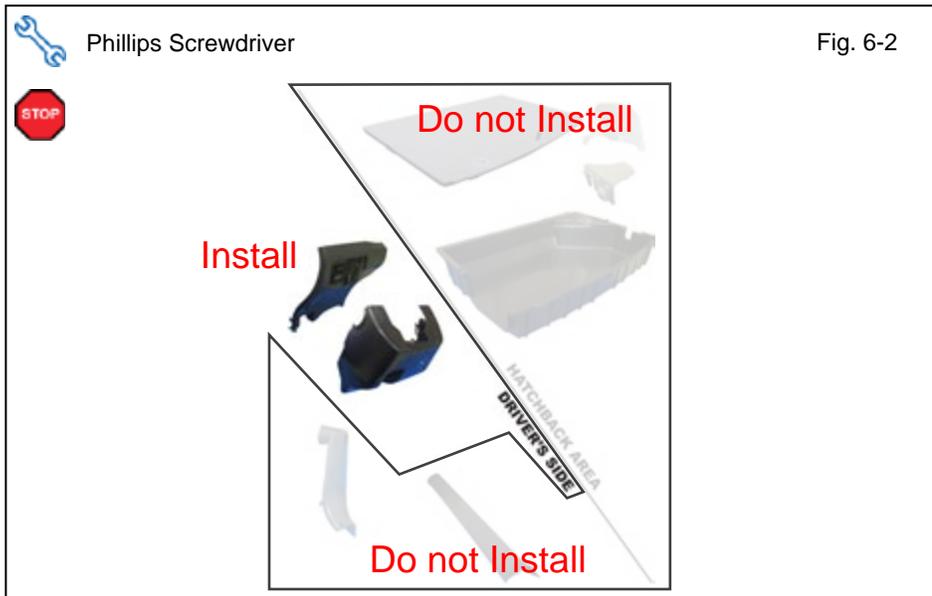

- c. Reassemble the dash of the Vehicle.



Note: Verify that panels fit together properly, with no uneven gaps.





Note: Make sure that all Connectors are reconnected.

- d. Verify that the Short Pin is Installed.
 - If not Install now.

7. Registration

- a. Open the Hood.
- b. Temporarily reconnect the Negative Battery Cable.

+ **CAUTION:** Do not touch the Positive Terminal.

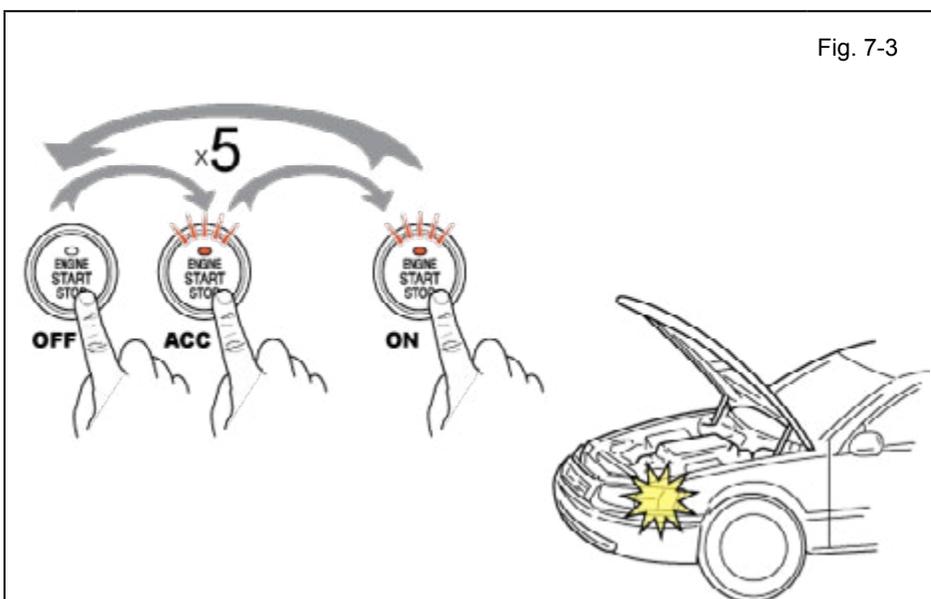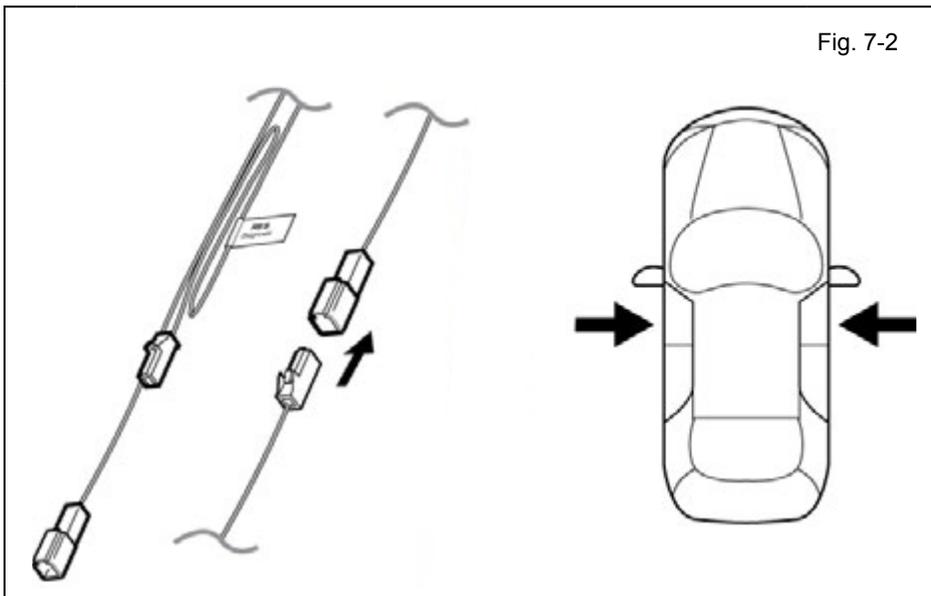

- c. Locate the 1P RES Diagnostic Connectors in the Driver's Side Cowl Area and connect them.

NOTE: Once connected you will have 10 minutes to complete this section, steps d-x.

- d. Close all doors.

- e. Place the Vehicle in Park (P) or Neutral (N) position.
- f. Cycle the Smart Key Ignition Button from OFF to ON 5 times.

NOTE: One cycle consists of: OFF → Accessory → ON. This is equivalent to pressing the Smart Key Ignition Button 14 times.

LOOK: for the Hazard Lights to Flash once.

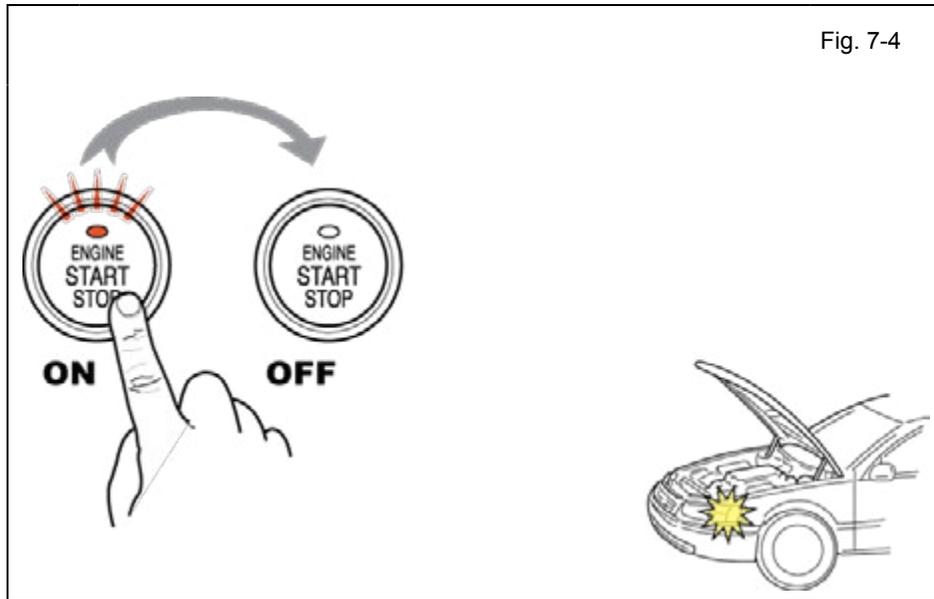


Fig. 7-4

- g. Start the Engine.
- h. After 10 seconds stop the Engine.

LOOK: For the Hazard Lights to flash Once.

IF THIS PROCEDURE FAILED

The Hazard Lights flash Three Times.

- Disconnect the V4 Harness's 1P RES Diagnostic Connectors.
- Start again from step c.

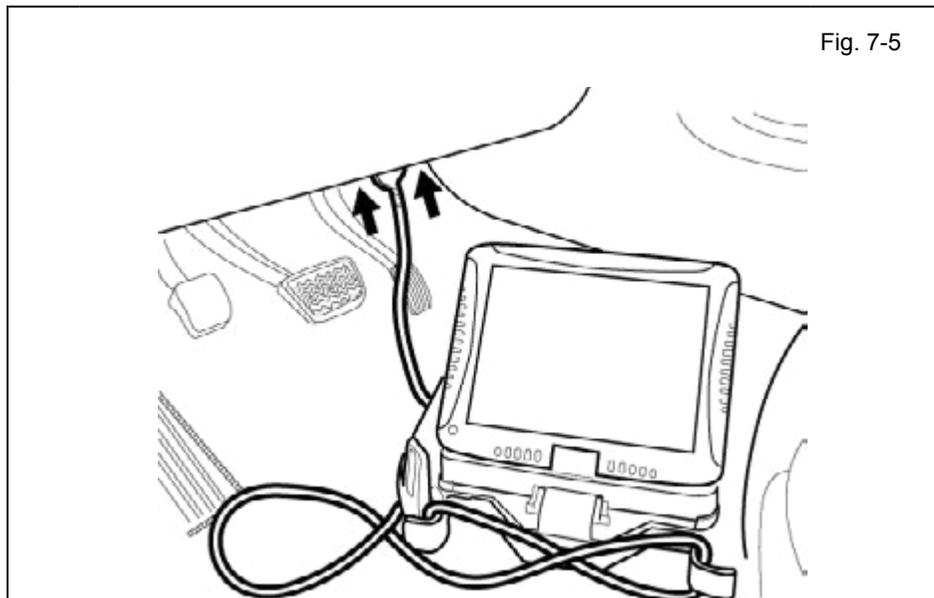


Fig. 7-5

- i. Connect the Techstream Notebook to the Vehicle's Diagnostic Port.
- j. With the Remote Control Key in your possession, press the Power Button twice to select the Ignition "ON" position.

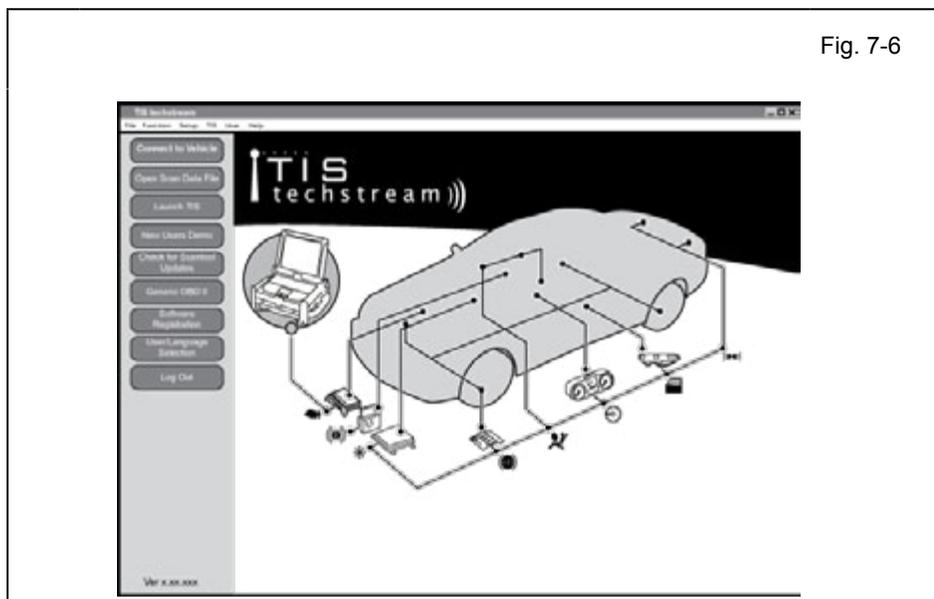


Fig. 7-6

- k. Start the TIS Techstream Application by clicking on the shortcut located on the Desktop.
- l. Click "Connect to Vehicle."

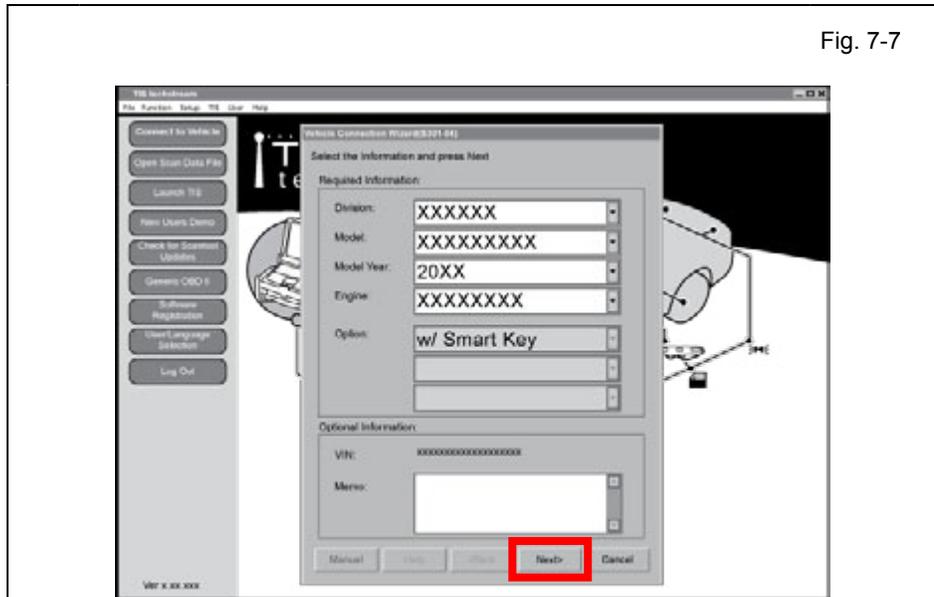


Fig. 7-7

- m. Confirm that the information displayed on the Vehicle Connection Wizard is correct for the vehicle. If not verify that the Techstream is properly connected.
- n. Select w/Smart Key.
- o. Click "Next>."

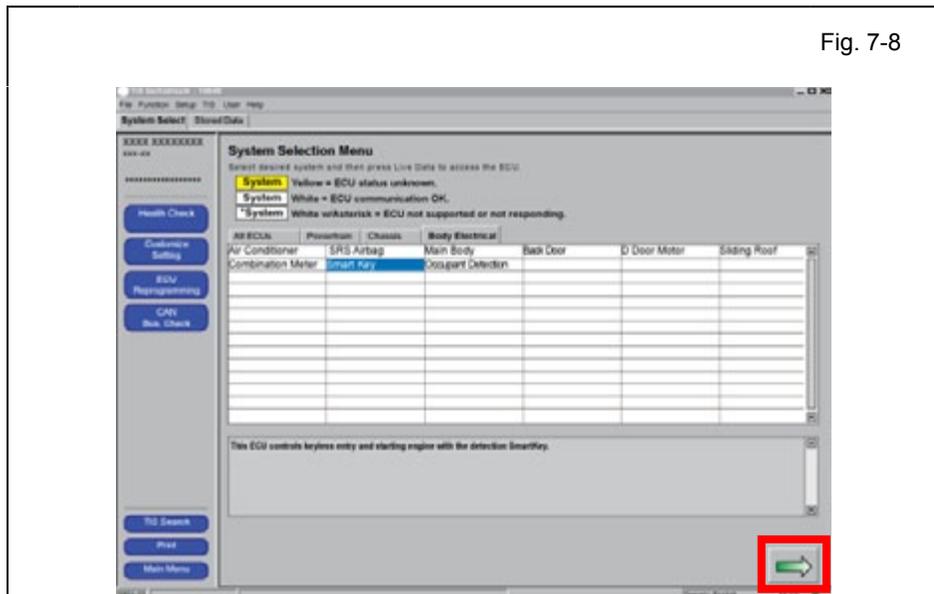


Fig. 7-8

- p. Select "Smart Key."
- q. Click .

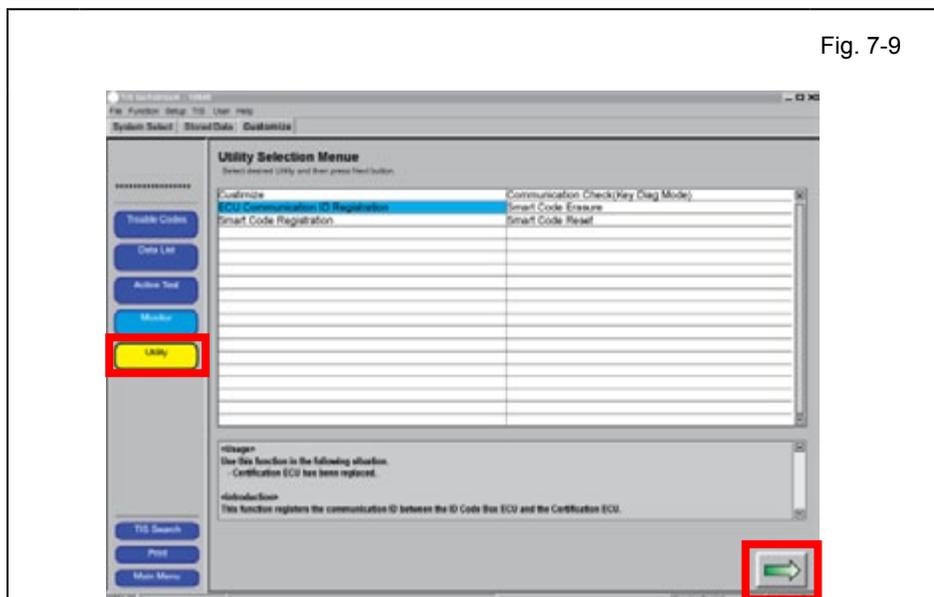


Fig. 7-9

- r. Click on the "Utility" Button.
- s. Select "ECU Communication ID Registration."
- t. Click .

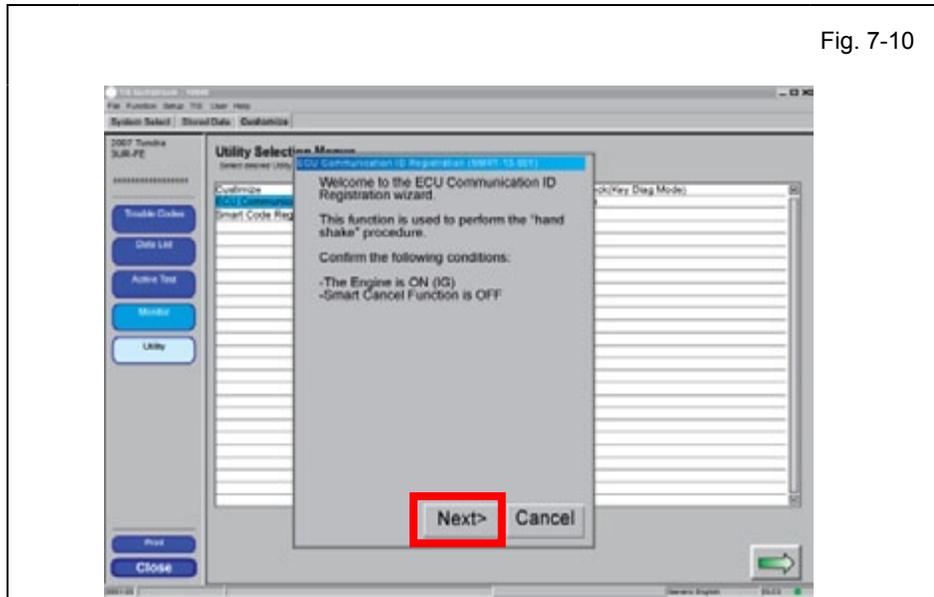


Fig. 7-10

u. Click "Next>."

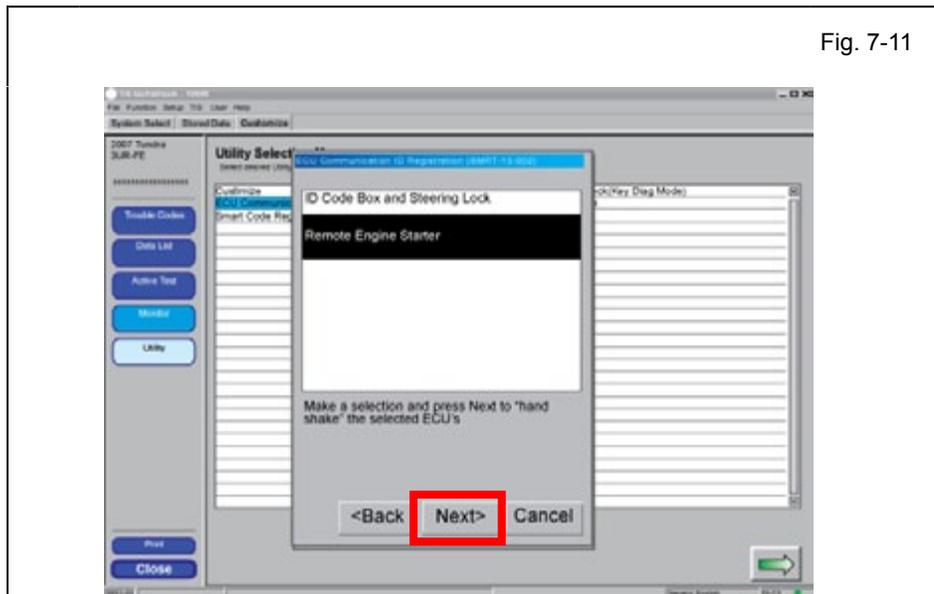


Fig. 7-11

v. Select "Remote Engine Starter."

w. Click "Next>."

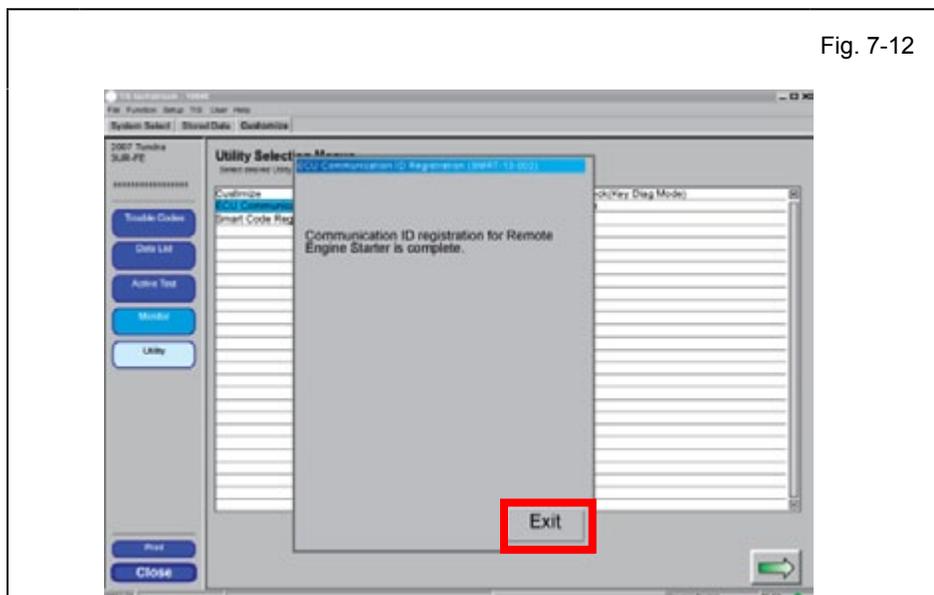



Fig. 7-12

CONFIRM: That the ECU Communication ID was completed successfully.


x. Click "Exit."

IF THIS PROCEDURE FAILED

- Start again from step p.

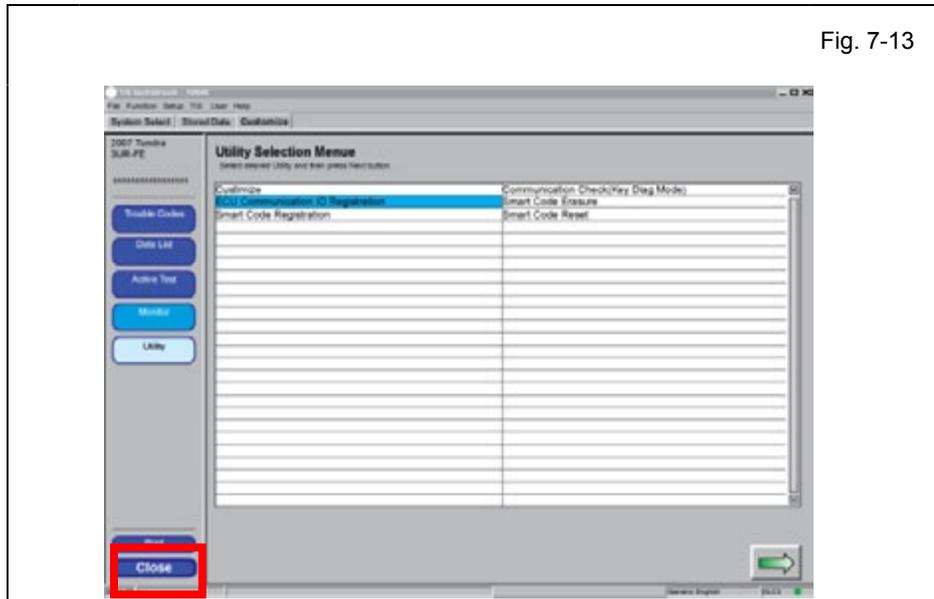

y. Click 

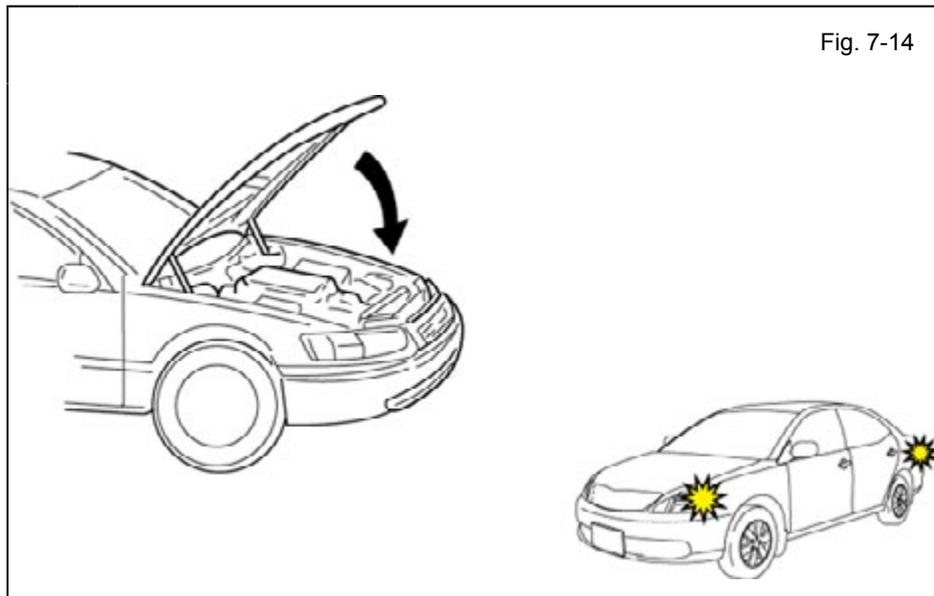

- z. Exit the vehicle.
- aa. Close the Hood.
- ab. Look for the Hazard Lights to flash twice.

IF THIS PROCEDURE FAILED

The Hazard Lights flash Three Times.

- Disconnect the V4 Harness's 1P RES Diagnostic Connectors.
- Start again from step c.

- ac. After a successful Registration Disconnect the 1P RES Diagnostic Connectors.
- ad. Using Electrical Tape secure the RES Diagnostic Connectors and Harness to the Vehicle Harness.

8. Tags and Labels.

- For US Vehicles use the English Tags and Labels, and discard the Spanish Tags and Labels.
- For Mexico Vehicles use the Spanish Tags and Labels, and discard the English Tags and Labels.
 - a. Using VDC approved cleaner and cleaning method, clean the area indicated on the Engine Compartment Cover.
 - b. Attach the Warning Label to the Engine Compartment Cover as shown.



CAUTION: Do not touch the adhesive surface.

- c. Using VDC approved cleaner and cleaning method, clean the indicated area on the Remote.
- d. Use a piece of Clear Tape to lift the Label off its protective backing.



CAUTION: Do not touch the adhesive surface.

- e. Attach the Key Label as shown.
- f. Attach the Key Tag.

REPEAT: steps c–f with the other Remote.

- g. Use Household Glass Cleaner to clean the inside of the Front Door Window.
- h. Use a piece of Clear Tape to lift the Label off its protective backing.



CAUTION: Do not touch the adhesive surface.

- i. Attach the Label as shown.



NOTE: Make sure to Align according to Etching or Other Label.

REPEAT: steps g–i with the other Window.

9. Complete the Installation.

- a. Position the Negative Battery Cable at the original factory position.



- Tighten the Nut to 48 in•lbf (5.4 N•m).



CAUTION: Do not touch the positive terminal.

- b. Finish reassembling the Vehicle.



VERIFY: That panels fit together properly, with no uneven gaps.



VERIFY: That all Connectors are plugged in.

Clean up and Remove trash.

- c. Sealed in its protective bag, place the Owner's Manual in the Glove box.
- d. Reset the power windows.
- Turn the ignition "ON."
 - Lower the Windows halfway.
 - Pull up on the Power Window Switches until the windows close.
 - Continue to hold up on the switches for a minimum of 1 Second.
- e. Reset the Moon Roof.
- Turn the ignition "ON."
 - Open the Moon Roof halfway.
 - Push and hold the Moon Roof Switch to close until the Moon Roof closes.
 - Continue to hold the switch for a minimum of 1 Second.

Accessory Function Checks

Close the hood, enter the vehicle and close all doors. Place the shift lever in the “P” (Park) position, set the parking brake and make sure the Vehicle is off.

	Perform	Look For
1	Press the remote control's lock button twice within 2 seconds, then press and hold the lock button for 3 seconds.	The hazard lights flash after 3 seconds. The engine starts. The hazard lights flash repeatedly for 10 seconds.
2	With the engine running, pull the hood release handle. NOTE: <i>Some Vehicles may require you to exit the Vehicle and pull up on the Hood.</i>	The engine stops. The hazard lights flash once. The security alarm triggers. (Only if equipped with OE Factory Alarm, not Genuine Accessory alarm, and only if armed)
3	Move the shift lever out of “P” (Park). Attempt to start the Vehicle using the remote.	The engine does not start.

Vehicle Function Checks

Function	Function
----------	----------

Enter the Vehicle

<input type="checkbox"/> Dome/Courtesy Lights	<input type="checkbox"/> Steering Wheel Column Adjusts Without Interference
<input type="checkbox"/> Horn	

Start the Vehicle

<input type="checkbox"/> Starter	<input type="checkbox"/> Gauges
<input type="checkbox"/> Panel/Switch Illumination	<input type="checkbox"/> ABS Light (if equipped) <i>If the warning light remains on, it may indicate a system malfunction.</i> 
<input type="checkbox"/> Lamp Failure Sensor <i>If the warning light remains on, it may indicate a system malfunction.</i> 	<input type="checkbox"/> Track/Skid Control Light (if equipped) <i>If the warning light remains on, it may indicate a system malfunction.</i> 
<input type="checkbox"/> Seat Belt Warning Light <i>If the warning light remains on, it may indicate a system malfunction.</i> 	<input type="checkbox"/> Tire Pressure Monitoring System (TPMS). <i>Prior to TPMS activation and Pre-delivery Service (PDS) of the Vehicle the TPMS light will blink when IG is turned on.</i> <i>After TPMS activation and PDS of the Vehicle the TPMS light will illuminate for a few seconds and go off when IG is turned on.</i> 
<input type="checkbox"/> Air Bag Warning Light <i>If the warning light remains on, it may indicate a system malfunction.</i> 	
<input type="checkbox"/> Cruise Control Light (if equipped) 	

Using a Mirror or Assistant check the following.

<input type="checkbox"/> Trunk/Tailgate/Bed Lights (if equipped)	<input type="checkbox"/> Tail Lights
<input type="checkbox"/> Brake Lights	<input type="checkbox"/> Daytime Running Lights (if equipped)
<input type="checkbox"/> Backup Lights	<input type="checkbox"/> Marker Lights
<input type="checkbox"/> Clearance Sonar (if equipped)	

Stop the Engine, Place the Vehicle's IG in the ON position.

<input type="checkbox"/> Hazard Lights	<input type="checkbox"/> Turn Signal Lights
<input type="checkbox"/> Head Light	<input type="checkbox"/> Fog Lights (if equipped)
<input type="checkbox"/> High Beams	<input type="checkbox"/> Accessory Controls/Illumination (if equipped)
<input type="checkbox"/> Power Side Mirrors (if equipped)	<input type="checkbox"/> Convenience Memory Settings (if equipped)
<input type="checkbox"/> Power Sliding Door (if equipped)	<input type="checkbox"/> Rear Sunshade (if equipped)

Function		Function	
<input type="checkbox"/>	Front Wiper/Washer	<input type="checkbox"/>	Rear Wiper/Washer (if equipped)
<input type="checkbox"/>	Power Sun/Moon Roof (if equipped)	<input type="checkbox"/>	Rollover Side Curtain Air Bag Switch (RSCA) (if equipped)
<input type="checkbox"/>	Clock (if equipped)	<input type="checkbox"/>	Navigation System (if equipped)
<input type="checkbox"/>	Audio/Video (if equipped)	<input type="checkbox"/>	USB Connections (if equipped)
<input type="checkbox"/>	Steering Wheel Audio Control (if equipped)	<input type="checkbox"/>	HVAC
<input type="checkbox"/>	Front Windshield Defogger (if equipped)	<input type="checkbox"/>	Rear Window Defogger (if equipped)
<input type="checkbox"/>	Side Mirror Defogger (if equipped)	<input type="checkbox"/>	Accessory Power Socket (if equipped)
<input type="checkbox"/>	Massage Seats (if equipped)	<input type="checkbox"/>	Heated/Vented Seats (if equipped)
<input type="checkbox"/>	Glove box Light (if equipped)	<input type="checkbox"/>	Passenger Air Bag Switch (if equipped)
<input type="checkbox"/>	Power Locks (if equipped)	<input type="checkbox"/>	Power Windows (if equipped)
<input type="checkbox"/>	Power Seats (if equipped)	<input type="checkbox"/>	Key Sensor Buzzer

