

**Part Number: PTMZD-1M160  
PTMZD-1M161**

## Kit Contents

Item #	Quantity Req'd.	Description
1	1	Navigation SD Card
2		
3		

## Hardware Bag Contents

Item #	Quantity Req'd.	Description
1		
2		
3		

## Additional Items Required For Installation

Item #	Quantity Req'd.	Description
1		
2		
3		

## Conflicts

None
------

## Recommended Tools

<b>Personal &amp; Vehicle Protection</b>	<b>Notes</b>
<b>Special Tools</b>	<b>Notes</b>
<b>Installation Tools</b>	<b>Notes</b>
<b>Special Chemicals</b>	<b>Notes</b>

## General Applicability

All iA models
---------------

### Recommended Sequence of Application


Item #	Accessory
1	
2	
3	


\*Mandatory


**Vehicle Service Parts** (may be required for reassembly)


Item #	Quantity Req'd.	Description
1		
2		
3		


### Legend


 **STOP:** Damage to the vehicle may occur. Do not proceed until process has been complied with.

 **OPERATOR SAFETY:** Use caution to avoid risk of injury.

 **CAUTION:** A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.

 **TOOLS & EQUIPMENT:** Used in Figures calls out the specific tools and equipment recommended for this process.

 **REVISION MARK:** This mark highlights a change in installation with respect to previous issue.

 **SAFETY TORQUE:** This mark indicates that torque is related to safety.

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation.

These guidelines can be found in the "Accessory Installation Practices" document.

This document covers such items as:-

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, rechecking torque procedure, etc.).
- Vehicle Disassembly/Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Please see your Scion dealer for a copy of this document.

## 1. Install the Navigation SD Card.

- (a) With the ignition in the OFF position, locate the SD Card slot (Fig. 1-1).



- (b) Open the SD card cover and insert the navigation SD card into the SD card slot (Fig. 1-2).



## 2. Confirm the Navigation Installation.

- (a) Turn the ignition to ACC or ON.
- (b) Press the NAV button on the center console (Fig. 2-1).



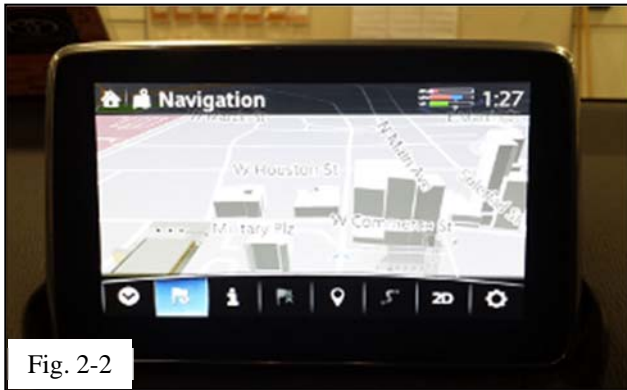


Fig. 2-2

(c) Confirm that the navigation screen is available (Fig. 2-2).



Fig. 2-3

(d) If navigation is not installed properly, a message will appear when trying to access navigation (Fig. 2-3).

Checklist - these points **MUST** be checked to ensure a quality installation.

Check:	Look For:
<u>Accessory Function Checks</u>  <input type="checkbox"/> Navigation  <input type="checkbox"/>	Navigation should be functional
<u>Vehicle Function Checks</u>  <input type="checkbox"/>	
<u>Vehicle Appearance Check</u>  <input type="checkbox"/> After accessory installation and removal of protective cover(s), perform a visual inspection.	Ensure no damage (including scuffs and scratches) was caused during the installation process. (For PPO installations, refer to TMS Accessory Quality Shipping Standard.)